

FEATURES

- Used by universities, hospitals and research institutes for long term storing of blood, skin cells, DNA, organs and vaccines
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)



VAC 11

| VAC | RELIABLE STORING AT LOW TEMPERATURE





VAC 21



VAC 31



DIGITAL CONTROLLER

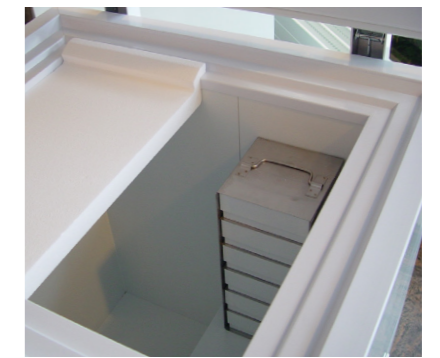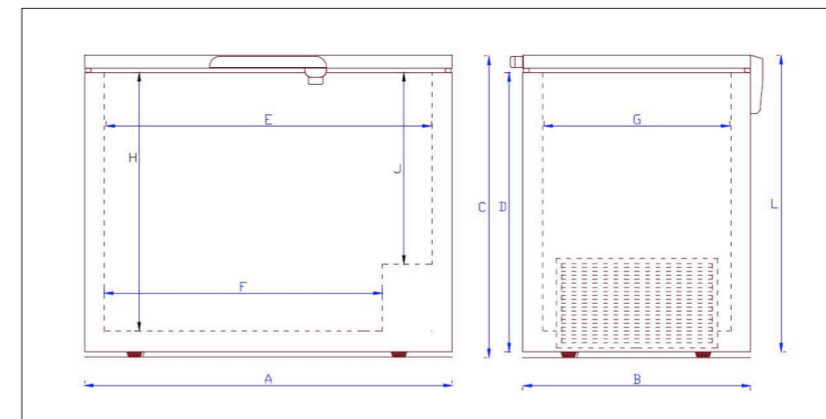

Inner lids (left hand side) which are mandatory for optimized function

	VAC 11	VAC 21	VAC 31
Ambient temperature range	+10 to +25	+10 to +25	+10 to +25
Gross volume, litres	130	226	300
Net volume, litres	130	226	300
Temperature range inside unit (Celcius)	-20 to -70	-20 to -70	-20 to -70
Refrigerant: Mix of 2 Hydro carbons	Yes	Yes	Yes
Energy consumption / 24 h kwh	4,3	5	5,2
Input power (watt)	375	455	544
DIMENSIONS			
External dimensions (WxDxH)	725*655*865	1055*655*865	1305*655*865
Internal dimensions (WxDxH)	520*450*650	850*450*650	1100*450*650
Dimension A	725	1055	1305
Dimension B	655	655	655
Dimension C	865	865	865
Dimension D	780	780	780
Dimension E	520	850	1100
Dimension F	320	650	900
Dimension G	450	450	450
Dimension H	650	650	650
Dimension J	400	400	400
Dimension L	850	850	850
Insulation (mm)	100	100	100
ACCESSORIES			
Dividers	Optional	Optional	Optional
Max. number of baskets (option)	0	0	0
EPS Inner lids	Incl.	Incl.	Incl.
Castors w. brakes	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt / 60 hz	Optional	Optional	Optional
Potential free contact	Incl.	Incl.	Incl.
Thermostat	Digital	Digital	Digital
Net weight, kg	56	67	80
Gross weight, kg	63	74	88
SHIPPING			
20' cont. Capacity	42	30	24
40' cont. Capacity	90	64	50
Standard Trailer capacity	102	72	56