


# TexWrite® Cleanroom Spiral Notebooks

Spiral-bound cleanroom notebooks

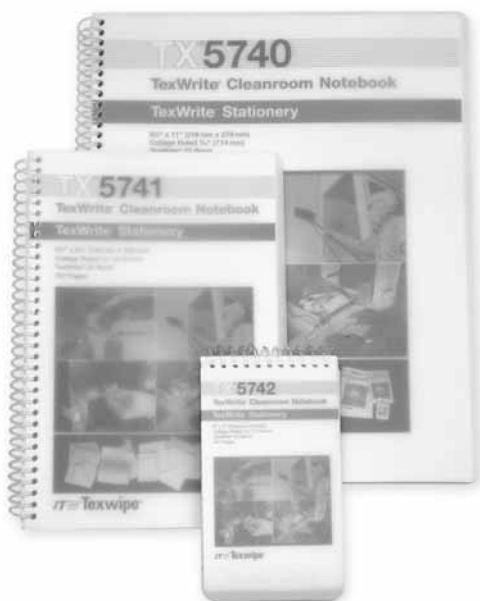

## Description

TexWrite® spiral-bound notebooks are an economical choice for note taking and data recording in the cleanroom. The notebooks feature high-density polyethylene covers, plastic spirals and durable TexWrite® latex-impregnated cleanroom paper. Pages are printed with IPA resistant, low-sodium ink for reduced ionic contamination. Notebooks lie flat and pages rotate freely for ease of use.

## Features

- White, college-ruled TexWrite® 22 cleanroom bond
- 100 writable pages (50 sheets)
- Spiral binding
- High-density polyethylene covers
- IPA resistant, low-sodium inks
- Cleanroom packaged

## Benefits

- Ultraclean with low particle and fiber generation
- Fully rotating pages with ability to lay flat
- Chemical-resistant cover material
- Low ionic contamination

## Applications

- Recording notebook
- Record keeping, data transfer and notes

## Products

TX Number	Description	Packaging
<b>TX5740</b>	TexWrite® 22 Cleanroom Spiral Notebook College-ruled, 8.5" x 11" (216 mm x 279 mm)	10/box
<b>TX5741</b>	TexWrite® 22 Cleanroom Spiral Notebook College-ruled, 5.5" x 8.5" (140 mm x 216 mm)	10/box
<b>TX5742</b>	TexWrite® 22 Cleanroom Spiral Notebook College-ruled, 3" x 5" (76 mm X 127 mm)	20/box



North America  
1210 South Park Drive  
Kernersville, NC 27284  
Tel (800) TEXWIPE  
(336) 996-7046  
Fax (336) 996-2297  
[www.texwipe.com](http://www.texwipe.com)  
[info@texwipe.com](mailto:info@texwipe.com)

Europe/Middle East  
Skejby Nordlandsvej 307  
DK-8200 Aarhus N  
Denmark  
Tel +45 87 400 220  
Fax +45 87 400 222

Asia/Pacific  
50 Tagore Lane  
#02-01 Entrepreneur Centre  
Singapore 787494  
Tel +65 6468 9433  
Fax +65 6468 6772

# TexWrite® Cleanroom Spiral Notebooks

TX5740 TX5741 TX5742

## Performance Characteristics

Property	Typical Value	Test Method*
Basis weight	80 g/m <sup>2</sup>	TM2: The Determination of Basis Weight
Caliper	5.0 mil	
Tensile strength		
Machine direction	5.3 kg	Federal Standards No. 191A:Methods 5102
Cross direction	4.5 kg	Federal Standards No. 191A:Methods 5102
Tear strength		
Machine direction	78 g	Elmendorf tear test
Cross direction	79 g	
Opacity	74%	TAPPI Test Method T-425
Surface resistivity	2.6 x 10 <sup>9</sup> ohms** (2.6 x 10 <sup>10</sup> ohms/sq)	TM14: The Determination of Surface Resistivity of Fabrics and Other Thin, Flat Materials (Adapted from EOS/ESD-S11.11-1993)

## Contamination Characteristics

Property	Typical Value	Test Method*
Particles (>0.5 µm)	4.8 million particles/m <sup>2</sup>	TM5: Particles Released from Wipers and Other Materials Under Conditions of Minimal Stress
Ions		
Sodium	85 ppm	TM12: The Determination of Ions in Wipers and Other Materials by Capillary Ion Analysis (CIA) Technique
Chloride	50 ppm	TM12: The Determination of Ions in Wipers and Other Materials by Capillary Ion Analysis (CIA) Technique

**Note:** The data in this table represent typical analyses of these products. These are not specifications. ITW Texwipe continually refines both its processes and its products.

This data is the most accurate representation of the typical properties of these products at the time of publication.

\* ITW Texwipe test procedures available upon request.

\*\* TM14 at 55% RH.